

Hybrid 5M/4M H.265+ DVR

4/8/16CH Hybrid 5IN1 DVR DVR-KH4511/DVR-KH8511/DVR-KH6521




DVR-KH4511/DVR-KH8511



DVR-KH6521

Dimension Unit : mm

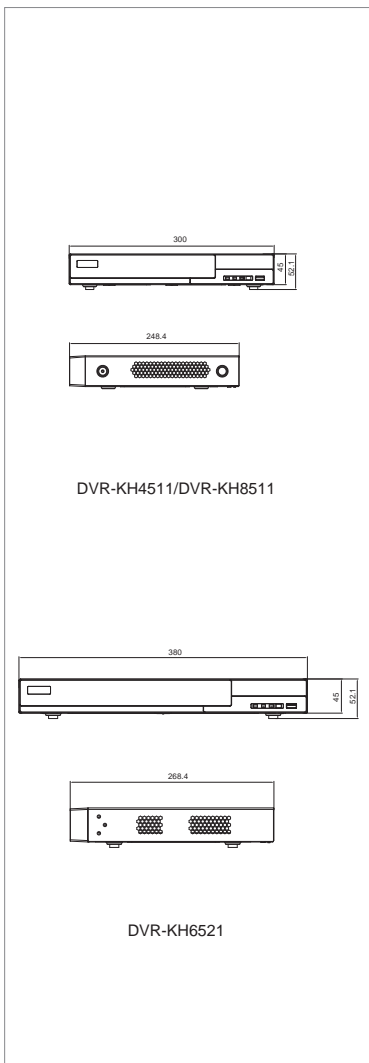

- AHD/TVI/CVI/CVBS/IP record.
- H.265 high profile compression algorithm, low bit rate, high picture quality.
- Dual stream - individual network video streaming and DVR record streaming.
- Phone remote view (iPhone / iPad / Android).
- Support P2P. QR code connection.
- Device ID setup for control keyboard.
- AHD/TVI 5MP/4MP camera input.
- Smart channel settings: Live / playback screen digital zoom, playback camera title and date / time position movable.
- Operation log list / Network online users list check.
- Intensive security function by chosen AUTHORITY. Convenient backup by AVI file.
- DVR control: mouse, control keyboard, network.
- IVS: Missing object / Tampering detection / Tripwire / Line crossing. (Used with a specific camera)

Model		DVR-KH4511	DVR-KH8511	DVR-KH6521	
Input	AHD/TVI/CVI	4CH	8CH	16CH	
	Max IPC Connection	6CH (4+2)	12CH (8+4)	16CH (8+8)	
	Total Connection	6CH	12CH	24CH	
Output	HDMI	1920x1080 / 1280x1024 / 1024x768			
	VGA	1920x1080 / 1280x1024 / 1024x768			
	CVBS	MAIN / SPOT			
Compression Method		H.265 High Profile			
Display Channel		1 / 4 / 9	1 / 4 / 9 / 16		
IPC Connection		4MP / 3MP / 1080P / 720P (Automatically adjustment by DVR)			
Recording Resolution	HD Analog	5MPL	40	80	160
		4MPL	48	96	192
		1080P	60	120	240
		720P/1080Lite/960H	120	240	480
	IP	3MP/4MP	30/CH		
		1080P/720P	30/CH		
Access Load (Mbps)		TBD	32 (4CH) 60 (12CH)	32 (8CH) 72 (16CH)	
Simultaneously Local Playback		4CH	8CH	16CH	
Record Quality		Highest / Higher / Medium / Lower / Lowest			
Recording Mode		Auto / manual / schedule / motion / alarm			
Playback Mode		Date & Time search / Event search			
Multi-task		Live / Record / Play / Network / Backup			
Motion Detect		22x18 grids camera for all channel			
Audio		4 input, 1 output	8 input, 1 output	8 input, 1 output	
Alarm		4 input, 1 output	8 input, 2 output	16 input, 4 output	
Storage		SATA x 1 (Support 10TB each)	SATA x 1 (Support 10TB each)	SATA x 2 (Support 10TB each)	
Backup		USB 2.0 / Network remote backup			
PTZ Control		PELCO-P, PELCO-D, CoC (UTC)			
Mobile Surveillance		iPhone / iPad / Android			
E-SATA		-	1	1	
Ethernet		10/100 M Base-T		10/100/1000 M Base-T	
Network-Function		Support licensed CMS / APP/ IE			
Network Connection		TCP/IP, PPPoE, DHCP, DDNS(Auto DDNS)			
Client Application		Display / Playback / Backup / DVR control / PTZ Control			
Power Source		DC12V			
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F)			
Dimension		300(W) x 52.1(H) x 248.4(D) mm		380(W) x 52.1(H) x 268.4(D) mm	