




# IP CAMERA

## IPC-2T58SQH

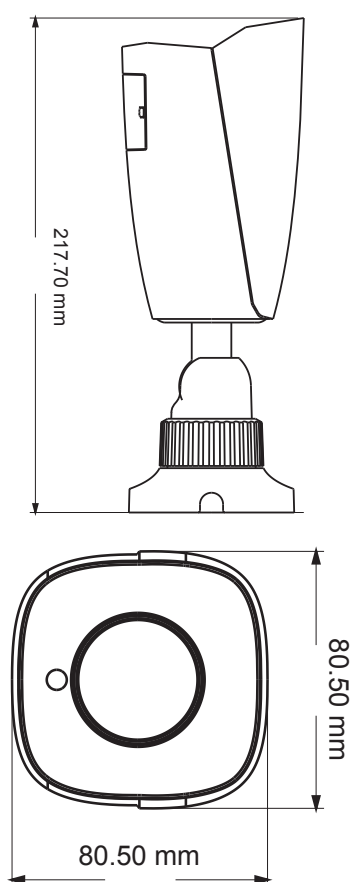

- H.265 / H.264 / MJPEG
- 2MP ( 1920 × 1080 )
- 30 ~ 50 M IR night view distance
- 3 DNR, WDR, HLC, BLC, Digital Defog
- 1CH audio input; Hardware reset
- Built-in micro SD card slot, up to 128GB
- ICR auto switch, true day / night
- Support ROI coding
- IP67 ingress protection
- Support DC 12V / PoE power supply
- Intelligent analytics: Exception, Line Crossing, Intrusion

**RoHS** CE FC

# 2MP IP IR WATER-PROOF BULLET CAMERA



## IPC-2T58SQH

Camera	
Image Sensor	1 / 2.9 " CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.0035 lux@F1.2,AGC ON; 0 lux with IR 0.013 lux@F2.0,AGC ON; 0 lux with IR
Lens	VF 2.8 ~ 12 mm @F1.4
Horizontal view Angle	88° ~34.8°
IR Distance	30~50 m
Day & Night	ICR auto switch
WDR	YES
BLC	YES
HLC	YES
Digital Defog	YES
Digital DNR	3 DNR
Image	
Video Compression	H.265 / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream (S1)	1080P / 720P @30fps
Sub Stream (S2)	D1 / CIF / 480 × 240 @30fps
Third Stream (S3)	-
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen,NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Audio	
Audio Compression	G711A / U
Two-way audio	-
Interfaces	
Network	RJ45
Video Output	-
Audio line in	1CH audio input
Audio line out	-
Alarm Input	-
Alarm Output	-
Storage	
SD card	Built-in micro SD card slot; up to 128GB
Network remote storage	Yes

Functions	
Remote Monitoring	Web browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, UPnP, HTTPS, HTTP, QoS
Interface Protocol	ONVIF
Smart Alarm	Motion detection, SD card full, SD card error
Intelligent Analytics	Exception, Line Crossing, Intrusion
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Yes
Others	
Power Supply	DC12V / PoE
Power Consumption	< 7.5W
Operating Environment	- 30 ° C ~ 60 ° C (-22° F~140° F) Humidity: less than 95 % (non-condensing)
Dimensions	80.5 × 80.5 × 217.7 mm
Weight	Approx. 650g
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)
Ingress Protection	IP67
Accessories	
<p>B627                      B640                      B639</p> <p>B615                      B616                      B628</p>	